



ATTENTION! HOLD OPEN FEATURE WILL ENGAGE THE FIRST TIME THE ROD IS PULLED OUT DURING INSTALLATION. **DO NOT** PUSH THE BUTTON TO RELEASE THE HOLD OPEN FEATURE. SIMPLY PULL ROD FARTHER OUT.

Operating the Touch 'n Hold® Push-Button Hold Open Feature

- 1. Press Button:** Door Stays Open
- 2. Push Door Farther Open:** Door Closes

Hardware Included

Kit Includes:


- 4 - #10 x 1x1/2" screws
- 2- #10 x 5/8" screws
- 1- Short pin
- 1- Long pin
- Short Yellow Spacer
- Jamb Bracket
- Door bracket
- Touch n Hold closer

Tools required:

- Power drill with a 1/8" drill bit
- No.2 Phillips screwdriver
- Pencil

Any questions – contact:
 email: info@touchnhold.com
 phone: 1-866-TH-Closer
 (1-866-842-5673)

Fig. 1 Full Scale

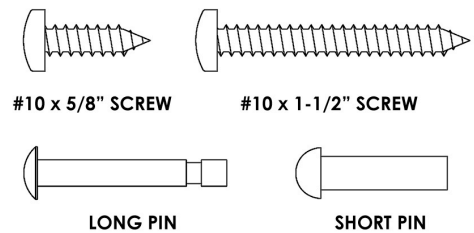


INSTALLATION

To see installation video visit: touchnholddoorclosers.com/how-to-install

1) Install the jamb bracket

Align the jamb bracket so that the edge is 1/4" (0.6cm) back from the door (Fig.2). Using a pencil, mark your door jamb at each of the four jamb bracket screw holes. Drill 1/8" pilot holes on the marks. Fasten bracket to jamb with the four #10 x 1-1/2" screws.


Note: Closer can be located anywhere on the door.

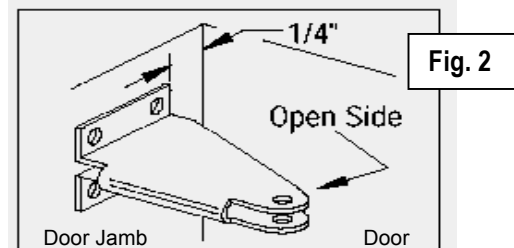

2) Attach closer to the jamb bracket

Using the short pin, attach the closer rod to the jamb bracket. With one hand, pull the cylinder out to expose more of the rod and then clip the small yellow spacer onto the rod. (Fig. 3). Allow the cylinder to retract.

Note: If the closer does not retract, simply pull the cylinder again and release. Do not touch the button.

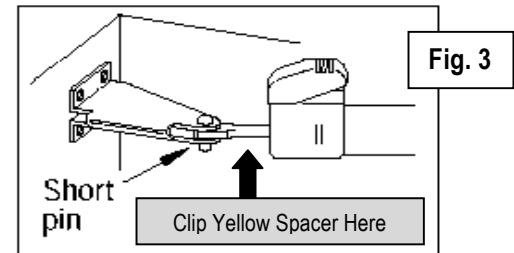

3) Attach door bracket to the closer and door


3.1) Attach door bracket to the closer

Using the long pin, secure the door bracket to the outer hole of the closer as shown in Fig. 4.

3.2) Attach the door bracket to the door


Holding the assembly level, align the door bracket on the door. Make sure the door is closed. Drill a 1/8" pilot hole through the two exposed holes of the door bracket.

Caution: Do not drill through the outside of the door! Now, fasten the bracket to the door using the two #10 x 5/8" screws. Remove the yellow spacer. **YOU DID IT!!!**

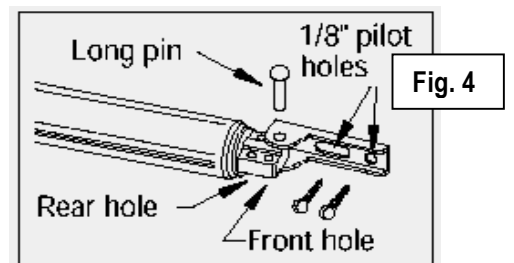


ADJUSTING YOUR CLOSER

Latching Force Adjustment

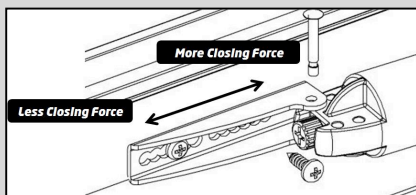

Closing Speed Adjustment

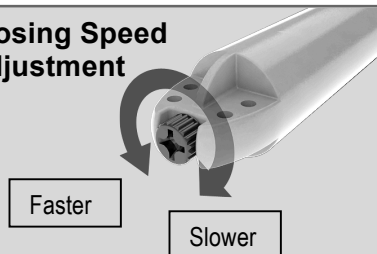

Greenstar

www.touchnhold.com

1157 Melville Ave. Fairfield, CT, 06825 US

Made in Taiwan – Two year Warranty